

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number  
**WO 2004/044342 A1**

(51) International Patent Classification<sup>7</sup>: E04C 3/29, 5/07

Marla [NL/AU]; West Street, TOOWOOMBA, Queensland 4350 (AU).

(21) International Application Number:

PCT/AU2003/001519

(74) Agent: FISHER ADAMS KELLY; LEVEL 13, AMP PLACE, 10 EAGLE STREET, BRISBANE, Queensland 4000 (AU).

(22) International Filing Date:

13 November 2003 (13.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2002952618 13 November 2002 (13.11.2002) AU  
2003902045 30 April 2003 (30.04.2003) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): THE UNIVERSITY OF SOUTHERN QUEENSLAND [AU/AU]; West Street, TOOWOOMBA, Queensland 4350 (AU).


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): VAN ERP, Gerardus,

[Continued on next page]

(54) Title: A HYBRID STRUCTURAL MODULE

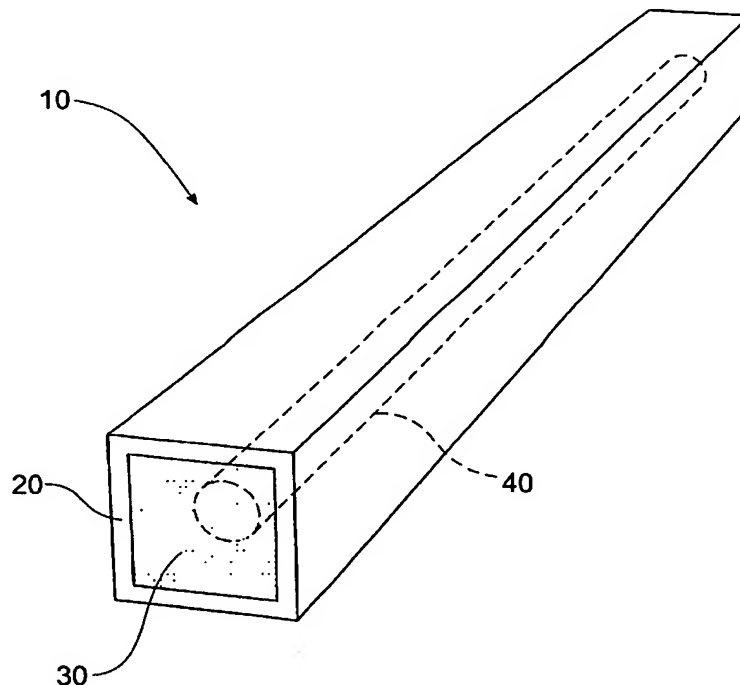

(57) Abstract: A hybrid structural module (10) comprising a tubular fibre composite member (20), a filled resin system (30) located within said tubular fibre composite member, and at least one elongated steel member (40) located within the filled resin system, wherein the filled resin system binds the steel member and tubular member together.